

# Terminations, Reverse Polarity

TNC, 1/2 Watt

## SPECIFICATIONS:

Models: 3201-TNCRP

### Electrical:


Frequency Range \_\_\_\_\_ DC - 1 GHz  
VSWR \_\_\_\_\_ 1.25:1 MAX.  
Impedance \_\_\_\_\_ 50 Ohms  
Input Power \_\_\_\_\_ 1/2 Watt @ +25°C  
Operating Temp Range \_\_\_\_\_ -55°C to +85°C

### Mechanical:


TNC Connector \_\_\_\_\_ Plated Brass  
Reverse Polarity Plug  
Housing \_\_\_\_\_ Plated Brass  
Conductors \_\_\_\_\_ Gold Plated Brass or Beryllium Copper

ALL SOLDERED CONSTRUCTION FOR  
MAXIMUM RELIABILITY.

**AEROFLEX**  
A passion for performance.

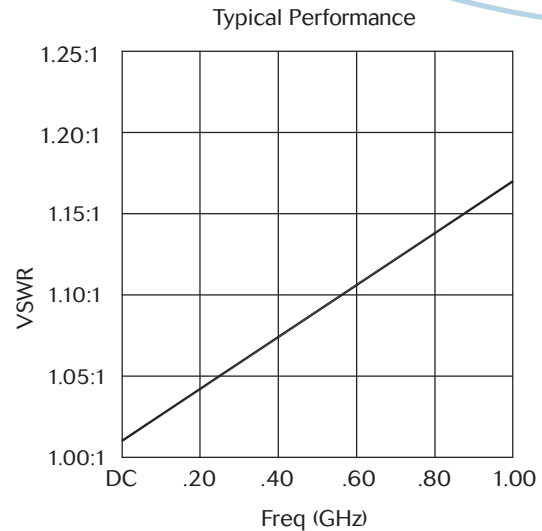

Model Number: 3201-TNCRP

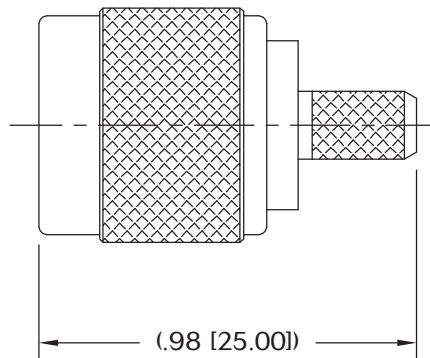

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.  
Design specifications are subject to change without notice.  
Contact factory for technical specifications before purchasing or use.

3201-TNCRP: REV -

**AEROFLEX**  
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.  
888-244-6638 or 734-426-5553 • FAX: 734-426-5557  
www.aeroflex.com/inmet • inmet@aeroflex.com