

TERMINATIONS

TNC MALE, DC - 4 GHz, 2 Watts

SPECIFICATIONS:

Models: 3201-TNCM, 3202-TNCM, 3204-TNCM

RoHS
Compliant

AEROFLEX
A passion for performance.


Electrical:

Frequency Range _____ DC - 4.0 GHz
 VSWR _____ See Below
 Impedance _____ 50 Ohms
 Input Power _____ 2 Watts @ +25°C
 Derated Linearly to 0.2 Watts @ +125°C
 Peak Power _____ 500 Watts Maximum
 (1uSec Pulse, .01% Duty Cycle)
 Operating Temp Range _____ -55°C to +125°C

Mechanical:

Connectors & Housing _____ Brass and/or Zinc Alloy
 Conductors _____ Gold Plated Beryllium Copper

ALL SOLDERED CONSTRUCTION FOR
 MAXIMUM RELIABILITY.

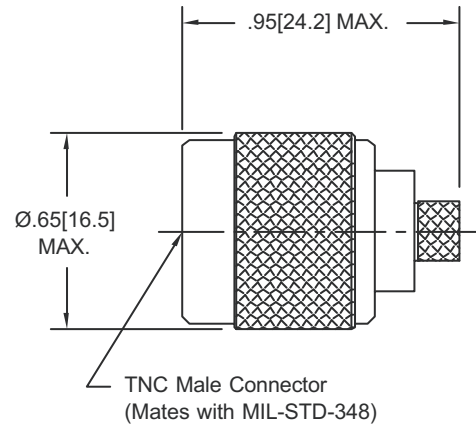

Model Number: **3201-TNCM**

Frequency Range _____ DC - 1.0 GHz
 VSWR _____ 1.05:1 MAX.


Model Number: **3202-TNCM**

Frequency Range _____ DC - 2.5 GHz
 VSWR _____
 DC - 1.0 GHz _____ 1.05:1 MAX.
 1.0 - 2.5 GHz _____ 1.15:1 MAX.

Model Number: **3204-TNCM**

Frequency Range _____ DC - 4.0 GHz
 VSWR _____
 DC - 1.0 GHz _____ 1.05:1 MAX.
 1.0 - 2.5 GHz _____ 1.10:1 MAX.
 2.5 - 4.0 GHz _____ 1.15:1 MAX.

3204-TNCM
 TYPICAL PERFORMANCE

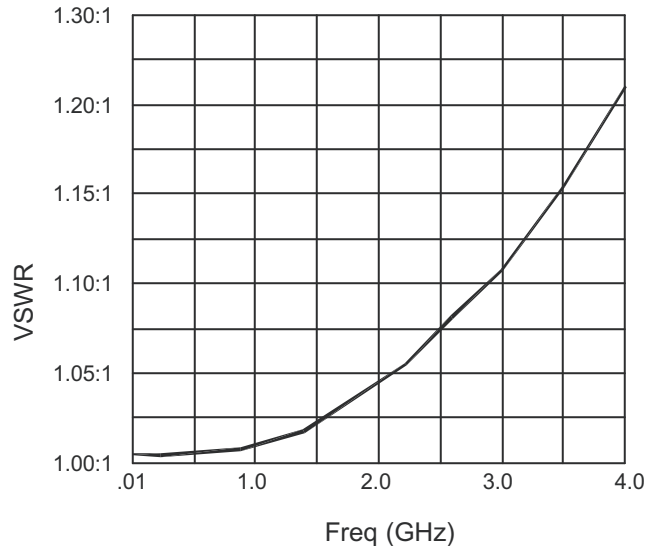

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

320X-TNCM: REV B

AEROFLEX
INMET

Aeroflex / Inmet, Inc. 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
 888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex.com/inmet • inmet-sales@eroflex.com